



CARTRIDGE REPLACEMENT INSTRUCTIONS


1. Turn off cold water supply under the sink. Fully open the cold water faucet to depressurize the system.

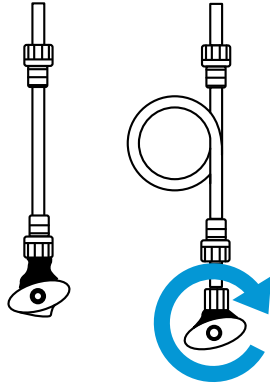

4. Ensure cartridge is securely attached prior to turning on water supply.

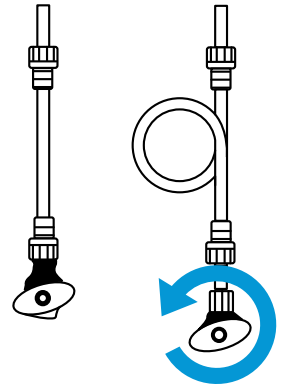


2. Remove the old cartridge from the manifold by rotating it to the left until it unlocks. Pull cartridge down and discard.

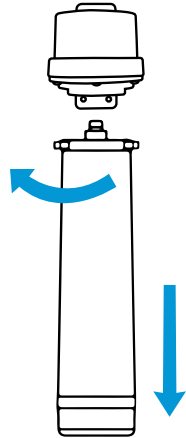

5. Turn on the water supply to pressurize the system and ensure there are no leaks.

6. Turn on kitchen faucet to cold water and run water through the cartridge at full force for at least 10 minutes. This action will purge the system of air and carbon fines ensuring maximum filter life and an effective water filtration system.

3. Remove new cartridge from packaging. Ensure all connection points are aligned before attaching new cartridge to the manifold. Push in the cartridge and turn to the right until it locks into place.

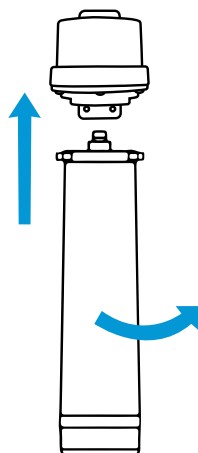

InterFlo is a trusted brand distributed exclusively through an authorized network of water treatment professionals

Please contact your local installing dealer for additional support or to order replacement cartridges.