




GET A TAP YOU CAN TRUST

Do you ever wonder what might be hiding in your glass of tap water? It may look clear, but there are many things that could be lurking in every glass.

Reverse osmosis (RO) drinking water systems are a point-of-use microscopic filtration solution. Contaminants like arsenic, lead, and nitrates are all captured by a membrane inside and flushed to the drain, protecting your family.

The **Hague WaterMax® H3500** drinking water system can provide the highest quality of water right from your faucet. Get peace of mind while giving your family the best with a new RO filter.

Multi-Stage Filtration
High Quality Water



Save Money Daily
Low Operating Costs



Protect Your Health
Removes Harmful Contaminants




Save The Environment
Reduces Bottled Water Use



SYSTEM FEATURES

HIGH PERFORMANCE MEETS LOW MAINTENANCE

- 1 Pre-filter removes chlorine, sediment, and other particles to prolong the life of the membrane cartridge
- 2 Membrane filter provides microscopic contaminant reduction
- 3 Prolonged contact filter ensures removal of any remaining contaminants
- 4 Non-electric pump fills tank five times faster than conventional RO Systems
- 5 Stores up to 3 gallons of water
- 6 Carbon post-filter provides a final polish before delivery
- 7 Includes long-reach dispensing faucet

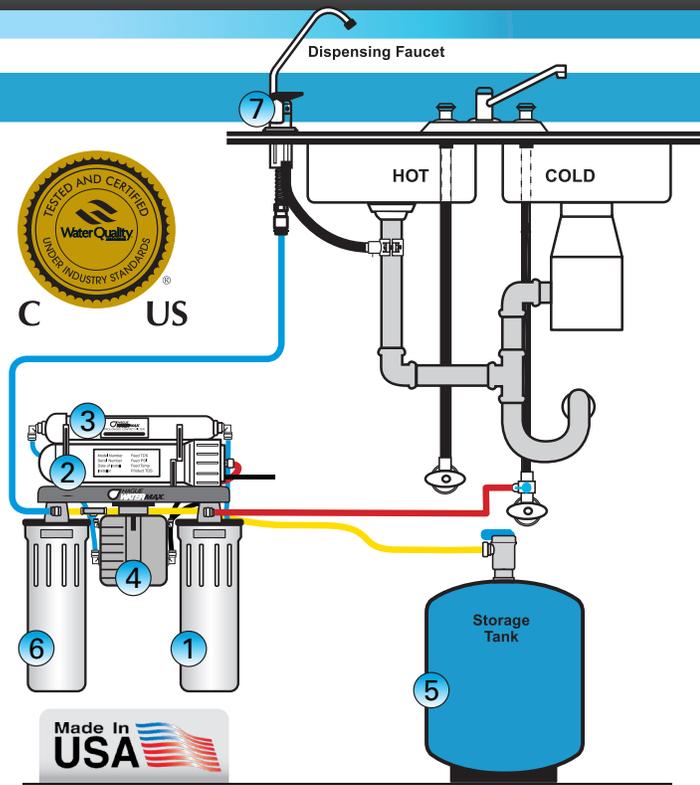

The H3500 and H6000 systems are certified by the Water Quality Association according to NSF/ANSI 58, NSF/ANSI 372 and CSAB483.1; see performance data sheet for specified claims.



WATERMAX H3500 SPECIFICATIONS

Model Number	H3500	
Part Number	100037693	
Pre-Filtration	1 Micron Carbon Block	
Membrane	TFC	
Post-Filtration	Granular Activated Carbon	
Production Rate ¹	29 gallons/day 109.77 liters/day	
Tank Storage Capacity	3 gallons 13.35 liters	
Water Pressure (Min-Max)	30-100 psi 207-689 kPa	
Water Temperature (Min-Max)	40-113° F 4.4-45° C	
TDS Rejection WQA @ 50 psi	WQA = 90.1%	
Dimensions: Height	16.75"	42.5 cm
Width	14.5"	36.8 cm
Depth	7.0"	17.8 cm
Weight	35 lbs 15.9 kg	

¹WQA production is measured against a pressure tank @ 5 (34 kPa) backpressure, 77° F (25° C), 50 psi (345 kPa) and 730 mg/L ± 40 mg/L TDS, 1 NTU turbidity 7.5 ± 0.5 pH, 1 US/cm.



www.haguewater.com

4343 S. Hamilton Road | Groveport, OH 43125
614-836-2115 | Fax: 614-836-5349