

FRESH SOFT WATER AT YOUR COMMAND

Get the cleaning power of fresh soft water whenever you need it from the Hague Maximizer. This system is designed to provide your home with soft water and money saving opportunities.

The Hague Maximizer system features either a Five-Button Controller (96MM) or a SmartTouch Controller (6MM), dual cabinet design, and an easy to fill salt tank. Feel the difference with the soft water you deserve.














SUPERIOR WATER

- 1 BUILT-IN BYPASS: Every Maximizer® comes equipped with a built-in bypass valve and test port for easy use and identification.
- 2 ULTRA-FIL: Whole-House, self cleaning dirt and sediment filter that replaces the need to change filters or cartridges.
- FINE MESH RESIN: Vacuum packed Fine Mesh Resin allows for quicker ion exchange, which equals
- less salt, time, and water usage versus standard mesh resin.
- **BACTERIOSTAT:** Protects the media by stopping bacteria from reproducing.
- SAFETY SHUT-OFF: Protects your system and home from water overflowing from a system failure.
- **GRID PLATE**: The grid plate will protect the air check valve and help ensure a consistent brine concentration.



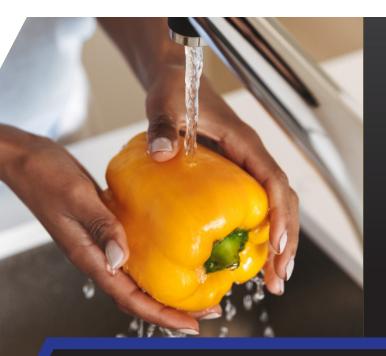

MAXIMIZER® 96 AND 6 MODELS

IVIAAIIVIIZEII	OU AIND U WIODLLU
Max Compensated Hardness	90 gpg (1.5g/L)
Max Ferrous Iron Reduction	10 ppm
Filtration-Nominal Rating	20 Microns
Media Amount	Fine Mesh Cation Resin - 1 cu. ft. (28 L)
Salt Used/Capacity: #1 Setting	1 lb/5,400 grains (0.5 kg/350 grams)
#2 Setting	3 lb/13,700 grains (1.4 kg/888 grams)
#3 Setting	6 lb/23,700 grains (2.7 kg/1540 grams)
#4 Setting	9 lb/30,800 grains (4.1 kg/2000 grams)
Minimum pH	7
Peak Flow Rate @15 psi drop	10.7 gpm (40.5 L/min)
Plumbing Connections	3/4" or 1" Male (MNPT)
Salt Storage Capacity	200 lbs (91 kg)
Electrical Requirements	115 V, 60 Hz
Min./Max. Water Temperature	20-120° F (0-49° C)
Water Pressure (min., max.)	20-120 psi
Dimensions	15"W x 38"H x 30"D



4343 S. Hamilton Road | Groveport, OH 43125 614-836-2115 | Fax: 614-836-5349